

CeramaZirc Ultra Tough


Advanced High Fracture Toughness Zirconia Composite

Dubbed 'ceramic steel', Zirconia (ZrO₂) ceramic materials offer a combination of high hardness, wear and corrosion resistance while still maintaining one of the highest figures for fracture toughness available.

CeramaZirc Ultra Tough is an advanced zirconia-based ceramic composite material based on partially stabilised zirconia and alumina platelets and is the latest and hardest composite to be introduced by Precision Ceramics.

Key properties of CeramaZirc Ultra Tough

- Use temperatures up to 1500°C
- Hot isostatically pressed (HIP'ed) for superior strength and reliability
- No compromise between bending strength, hardness and fracture toughness
- Remarkably high fracture toughness and impact resistance while maintaining above average values for bending strength and hardness
- Toughening by crack deflection provided by unique microstructure of alumina platelets in a partially stabilised zirconia matrix
- Increased resistance to hydrothermal ageing through Ceria partial stabilisation

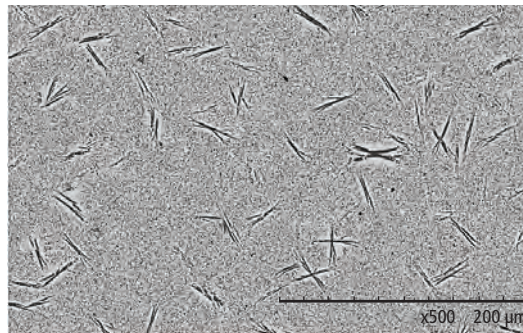

Typical uses of CeramaZirc Ultra Tough

- High pressure equipment- ball valve balls and seats – particularly suitable for applications where mechanical shock, impacts and/or vibrations are present
- Ultra high pressure pumping elements
- Flow control devices for ultra-high pressure equipment - stems and seats for high pressure homogenisers
- Deep well down-hole valves and seats
- Rollers and guides for metal forming

CeramaZirc Ultra Tough

Density [g/cm³] = 5.7
 Flexural Strength [MPa] = 1000
 Compressive Strength [MPa] = in excess of 2000
 Young's Modulus [GPa] = 235
 Poisson Ratio = 0.29
 Hardness HV_{0.5} [GPa] = 13
 Fracture toughness K_{IC} [MPa/m²] = 17
 Max use temperature [°C] = 1000

*K_{IC} toughness as measured by the Indentation method

N.B. Values presented are mean values for the samples tested and are given as an indication only for the purpose of comparing between different materials. The properties of the actual material might vary slightly and could be affected by the shape and size of the part.

www.precision-ceramics.co.uk
 Advanced Technical Ceramic Solutions



PRECISION CERAMICS

86 Lower Tower Street, Birmingham B19 3PA, England
 Tel: +44 (0) 121 687 5858 Fax: +44 (0) 121 687 5857
 Email: info@precision-ceramics.co.uk
www.precision-ceramics.co.uk