


How to find us



Approaching Birmingham on the M6, exit at junction 6 onto A38M. Exit at the second junction and at the roundabout bear right onto A4540. Cross lights into New John Street then turn first left into Summer Lane. Then take the third left into Lower Tower Street.

Alternatively simply set your Sat Nav to B19 3PA. There are two public car parks adjacent to the main building.

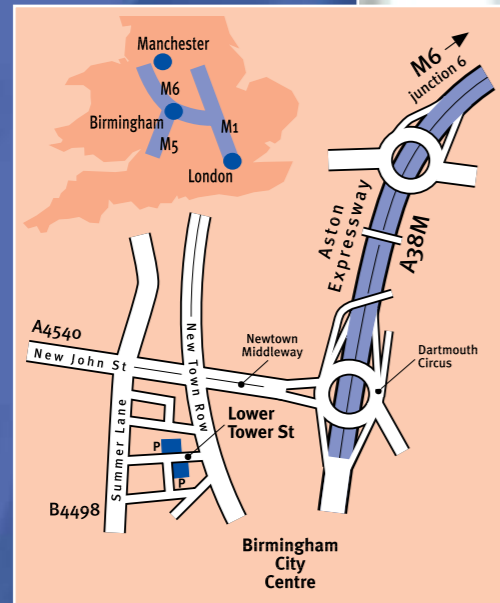

PRECISION CERAMICS LIMITED

86 Lower Tower Street, Birmingham B19 3PA, England

Tel: +44 (0) 121 687 5858 Fax: +44 (0) 121 687 5857 Email: info@precision-ceramics.co.uk

www.precision-ceramics.co.uk

PRECISION CERAMICS EUROPE LIMITED

Unit 314 Eurobase Park, IDA Industrial Estate, Cork Road, Waterford, X91 EH5N, Ireland

Tel: +353 51 550 480 Email: info@precision-ceramics.eu

www.precision-ceramics.eu



PRECISION CERAMICS USA, INC.

9843 18th St North, Suite 120, St Petersburg, FL 33716

Tel: (727) 388 5060 Fax: (813) 435 2020 Email: info@precision-ceramics.com

www.precision-ceramics.com

Precision Ceramics is a division of McGeoch Technology Limited
© 2020 - MMXX Precision Ceramics
Tornado photograph courtesy of BAE Systems



*total ceramic solutions
for the 21st century*



Precision Ceramics is a company dedicated to the engineering of technical ceramics and offers a complete service from procurement and supply through to technical design and specialist machining.

Since its formation in 1992, Precision Ceramics, a division of McGeoch Technology, has gained a truly international reputation for quality and service with specialist ceramic components engineered by the company finding their way into an ever-widening array of worldwide applications in industries as diverse as aerospace, electronics and opto-electronics, power generation and offshore oil and gas production.

In both new applications and in areas where technical ceramics are already being used, Precision Ceramics has the necessary expertise and in-depth knowledge to quickly find the best way forward for any potential application from prototypes through to full-scale production of components. And once fully up and running, we can easily take the process one stage further by offering expert advice in the engineering of more demanding materials.

The company operates to the very highest quality standards and holds ISO 9001:2015 approval.



Key Services

- Rapid Response
- Extensive range of materials available from stock
- Prototype through to production quantities
- Wide experience of vacuum applications
- Total solution provision
- Complete design service
- Full in-house machining and grinding capability

Design Solutions

Precision Ceramics has a wealth of 'hands-on' experience working with technical ceramics and since its formation has developed a wealth of knowledge in component design, all computer based for speed and accuracy.

Experience gained in actual applications enables us to offer the best possible advice in choice of material. And once made, that choice provides the basis for our technical design team to take a basic idea and turn it into the engineering reality of a finished component.

Machinables & Non-Machinables

Our ceramics fall into two basic categories:

Machinables - ceramics that are fully dense, require no post heat treatment and can be machined with ordinary metal-working tools.

Non-Machinables - ceramics that once fired can only be machined using diamond grinding methods or other specialist machining practices.

Machinables are the perfect choice if rapid turn-round is required. They also provide the ideal basis for prototyping before moving up to harder materials.

Non-machinables offer a more extensive range of properties but require specialist tooling and longer lead times. This said, they are often more cost effective in the longer term.

Procurement & Supply

When McGeoch first introduced technical ceramics into their product range, they quickly became a principal UK distributor for Macor®, a unique machinable glass ceramic manufactured exclusively by Corning Incorporated. Other major distributorships quickly followed both in the UK and throughout Europe.



Nowadays, Precision Ceramics offers many other specialist materials to complement its operation. These include Macor® Shapal™ Machinable Aluminium Nitride, Boron Nitride, Alumina, Zirconia and Pyrophyllite (see centre pages for a full list of the materials we stock)

All these materials are available in plates, rod and bars as well as finished components, designed and machined to precise customer specifications.

Manufacturing

Precision Ceramics has extensive in-house machining facilities including 4th and 5th axis machining centres to enable us to manufacture ceramic components to the highest specifications. A fully controlled inspection facility with co-ordinated measurement system accurate to 0.002mm is also in operation to ensure that our rigorous quality standards are maintained at all times.

Precision Ceramics specialises in small batches between 1 and 2,000 pieces but are quite happy to tender for larger quantities.

The Industries We Serve

- Aerospace (Military & Civil)
- Automotive
- Defence
- Dentistry
- Domestic Household
- Electronics & Opto-Electronics
- Foundry
- Medical
- Nuclear Power
- Offshore Oil & Gas
- Power Generation



PRECISION CERAMICS

total ceramic solutions for the 21st century

Macor

Machinable Glass Ceramic

Macor® is an outstanding engineering material and is machinable with ordinary metalworking tools. Macor is also a problem solving material combining the performance of a technical ceramic with the versatility of a high performance plastic.

Macor has a high use temperature (800°C continuous – 1,000°C peak). It has a low thermal conductivity and is a useful high temperature insulator as well as an excellent electrical insulator. Macor has no porosity and when properly baked out, will not outgas. It is strong and rigid and, unlike high temperature plastics, will not creep or deform. Macor is also radiation resistant.

Macor is pure white and can be highly polished. It can be thick film metallised, brazed and epoxy bonded. Another major advantage of this unique material is that, even in small quantities, components are economical to manufacture.

Typical applications: Electronic and semiconductors; nuclear applications; medical and optical devices.

Shapal

Machinable Ceramic

Shapal™ is a new type of machinable ceramic and combines a high thermal conductivity with a high mechanical strength with bending strengths of 30 kg/mm². Shapal-M soft, in particular, has an excellent sealing ability to vacuum. It also has good heat resistance and an extremely low coefficient of thermal expansion.

Shapal-M maintains a low dielectric loss and also has an ultra high purity level.

Typical applications: Electronic components, especially where electrical insulation and heat dissipation are required. Also components where low dielectric constant and dissipation factor are required; fixturing parts where a low coefficient of thermal expansion is required.




Boron Nitride

Boron Nitride is an advanced synthetic ceramic material available in powder, solid, liquid and aerosol spray forms. Its unique properties – from high heat capacity and outstanding thermal conductivity to easy machinability and superior dielectric strength – making Boron Nitride a truly outstanding material.

In its solid form, Boron Nitride can easily be machined to close tolerances in virtually any shape. After machining, it is ready for use without additional heat treating or firing operations.

In inert and reducing atmospheres, Boron Nitride will withstand temperatures over 2,000°C. It is not wet by most molten metals and slags and can therefore be used as a container for most molten metals including aluminium, cryolite, sodium, iron, steel, silicon, boron, tin, germanium and copper.

Typical applications: Metals manufacturing, containment and processing; foundry applications.

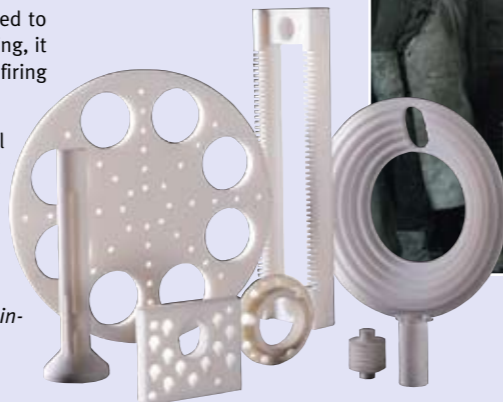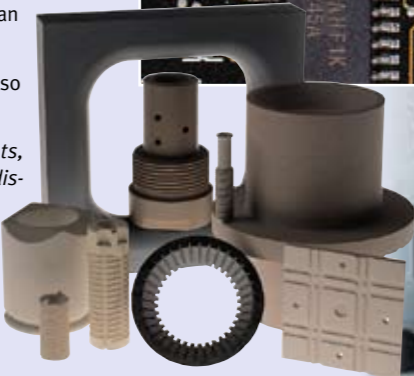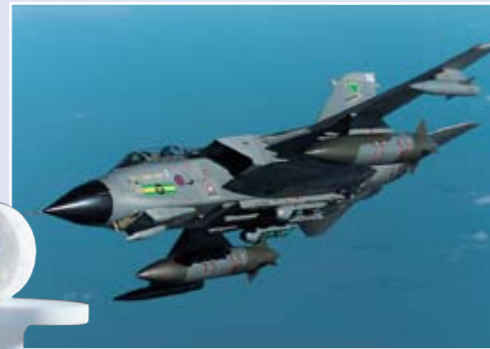

Oxides

Alumina, Zirconia

Alumina and zirconia are hard wearing materials used for many applications. Once fired and sintered, they can only be machined using diamond-grinding methods.

Alumina's combination of hardness, high temperature operation and good electrical insulation makes it useful for a wide range of applications. Alumina is the most commonly used type of ceramic and is available in purities up to 99.9%.

Zirconia is similar to alumina in many of its properties but offers significant improvement in fracture toughness. It is particularly useful in applications where the mechanical strength of alumina is not sufficient.

Typical applications: electrical insulators; seal faces; valve seats.



Nitrides

Aluminium Nitride and Silicon Nitride

Aluminium nitride is an interesting material and is one of the best materials to use if high thermal conductivity is required. When combined with its excellent electrical insulation properties, aluminium nitride is an ideal heat sink material for many electrical and electronic applications.

Silicon nitride is an extremely hard material and is very useful for applications in which physical wear is of great importance. Silicon nitride also has very good thermal shock characteristics.

Typical applications: electronic components; heat sinks; turbine blades.



Carbides

Silicon Carbide

Like oxides and nitrides, silicon carbide is a very hard wearing material, again requiring diamond-grinding methods to process once fired.

Although not exclusively, carbides are used mainly for applications in which physical wear is a major consideration. They are amongst the hardest materials available.

Typical applications: valve seats; bearings.



PRECISION CERAMICS

total ceramic solutions for the 21st century



MACHINABLES

NON-MACHINABLES

	COLOUR	DENSITY	POROSITY	POISSONS RATIO	THERMAL CONDUCTIVITY	COEFFICIENT OF THERMAL EXPANSION	DIELECTRIC STRENGTH	DIELECTRIC CONSTANT	FRACTURE TOUGHNESS	FLEXUAL STRENGTH	HARDNESS	DC VOLUME RESISTANCY	MAX USE TEMPERATURE	THERMAL EXPANSIVITY	SPECIFIC HEAT	COMPRESSIVE STRENGTH
MACOR	White	2.52 g/cm ³	0%	0.29	1.46 Wm/°C	9.3x10 ⁻⁶ /°C 25-300°C	40 KV/mm	6.03 1 KHZ 25°C		94 MPa	400 Vickers	>10 ¹⁶ ohm/cm	1000°C	13x10/K	0.79 KJ/kg°C	345 MPa
SHAPAL - M	Fawn	2.9 g/cm ³	0%	0.31	90 Wm/°C	4.4x10 ⁻⁶ /°C	40 KV/mm	7.1 1 MHZ 25°C			560 Vickers	>10 ¹² ohm/cm	1000°C/1900°C*	5.2x10/K		1200 MPa
FIRE LAVA	Brown/pink		2.6%		1.25 Wm/°C	29x10 ⁻⁶ /°C	100 V/mm	5.3		10,000 psi	6 Mohs		1100°C/1600°C*			105 MPa
ZSBN	Grey	2.9 g/cm ³	2.4-3.4%		para 22.62 perp 40.21 Wm/°C	para 6.4 perp 1.98 x 10 ⁻⁶ /°C				para 10,460 perp 20,790	95-105 kg/mm Knoop		850°C/1600°C*	1100/1200°C	para 0.722 perp 0.705 (@100°C)	31.74 psi 23°C
BORON NITRIDE grade A	Off-white	1.92 g/cc	2.84%		para 30.13 perp 33.17 Wm/°C	para 11.85 perp 3.12 x 10 ⁻⁶ /°C	2400 V/mm	4.15-4.58		para 11,000 perp 16,400	15.51-24.19 kg/mm Knoop	>10 ¹⁴ ohm/cm	850°C/1100°C*	1100/1200°C	1.61 @700°C (J/g°C)	para 20,780 perp 27,060 psi 25°C
BORON NITRIDE HP grade	White	1.9 g/cc	15.26%		para 27.37 perp 30.97 Wm/°C	para 2.95 perp 0.87 x 10 ⁻⁶ /°C	1700 V/mm	4.02-4.3		para 6,340 perp 8,730	13.79-18.95 kg/mm Knoop	>10 ¹⁴ ohm/cm	850°C/1100°C*	1100/1200°C	1.468@700°C (J/g°C)	para 4,370 perp 6,460 psi 25°C
BORON NITRIDE AXo5	White	1.91 g/cc	14.2%		para 71.3 perp 121.2 Wm/°C	para 0.57 perp 0.46 RT -1500°C x 10 ⁻⁶ /°C	2000 V/mm	4.0		para 2,025 perp 3,125	3.42-491 kg/mm	>10 ¹⁴ ohm/cm	850°C/2000°C*		1.5@700°C (J/g°C)	para 2,600 perp 3,400 psi 25°C
ALN	Fawn/grey	3.3 g/cm ³	0%		180 Wm/°C	3.8x10 ⁻⁶ /°C	20 KV/mm	9 1 MHZ	3.0 KIC	360 MPa	1100 Vickers	>10 ¹⁴ ohm/cm	1800°C		800 J/kgK	
BeO	White	2.9 g/cm ³			260 Wm/°C	10 ⁻⁶ /°K	10 KV/mm	7 1 MHZ		200 MPa	1200 Vickers	>10 ¹⁴ ohm/cm	1700°C		1000-1320 J/kgK	1750 MPa
BORON CARBIDE (B ₄ C)		2.48 ± 0.02/ g/cm ³	0%	0.19 ± 0.02							3330 Vickers	- 0.85 ¹⁰	680°C		1.2 J/kgK	390 MPa
SILICON NITRIDE	Grey	2.5 g/cm ³		0.2	10-15 Wm/°C	3.2x10 ⁻⁶ /°C 20-800°C		10		200 MPa	1100 Vickers	>10 ¹⁰ ohm/cm	1150°C	3.1 500-1300	1100 J/kgK	550 MPa
PORCELAIN	White	2.4 g/cm ³	0%		2.06 Wm/°C	6.5x10 ⁻⁶ 20-800°C	25 KV/mm				7-8 Mohs					480 MPa
SILICON NITRIDE sintered	Grey	3.3 g/cm ³	0%	0.24	25 Wm/°C	3x10 ⁻⁶ /°C				650 MPa 20°C	1500 Hvo.3	>10 ¹⁰ ohm/cm	1150°C	3.3 500-1300K	800 J/kgK	2000 MPa
SILICON CARBIDE sintered	Black	3.1 g/cm ³	0%	0.17	150 Wm/°C	3x10 ⁻⁶ /°C				400 MPa 20°C	2800 Hvo.3		1400°C	3x10 ⁻⁶ °C	1100 J/kgK	2000 MPa
ZIRCONIA YTRIA stabilised	White	6.05 g/cm ³	0%	0.3	2 Wm/°C	10x10 ⁻⁶ /°C			10 KIC	1000 MPa (e20°C)	1300 Hvo.3	10 ⁹ ohm/cm 25°C	1000°C	10x10 ⁶ °C	400 J/kgK	2000 MPa
ZIRCONIA Mgo stabilised	Cream	5.6 g/cm ³	0%	0.31	2.5 Wm/°C	10x10 ⁻⁶ /°C			6.0 KIC	545 MPa (e20°C)	1120 Hvo.3	>10 ¹⁰ ohm/cm 25°C	1000°C		400 J/kgK	1700 MPa
ULE	Clear	2.2 g/cm ³	0%	0.17	1.31 Wm/°C	0x10 ⁻⁹ /°C						>10 ¹¹ ohm/cm	800°C		766 J/kgK	
ALUMINA 96% substrate	White	3.8 g/cm ³	0%		24 Wm/°C	7.8x10 ⁻⁶ /°C	10 KV/mm	9.8		360 MPa	1500 Vickers	10 ¹³ ohm/cm	1600°C	64x10 ⁻⁶	800 J/kgK	
ALUMINA high-purity re-crystallised	Off-white	3.8 g/cm ³	0%		30 Wm/°C		17 KV/mm	9.9			9 Mohs scale	10 ¹⁴ ohm/cm	1900°C	8.5x10 ⁻⁶	900 J/kgK	3500 MPa
ALUMINA high purity	Off-white	3.5 g/cm ³	0%	0.22	20-28 Wm/°C	84x10 ⁻⁶ /°C	10-25 KV/mm	9-10		330 MPa	1650 Vickers	10 ¹⁴ ohm/cm	1650°C	7.5-8.2x10 ⁻⁶	880 J/kgK	3700 MPa
QUARTZ	Clear	2.2 g/cm ³	0%	0.17	1.4 Wm/°C	0.55x10 ⁻⁶ /°C	25-40 KV/mm	3.8		80 MPa	1000 Vickers	10 ¹⁸ ohm/cm	1100/1400°C*	54x10 ⁻⁶	700 J/kgK	1100
SAPPHIRE	Clear	3.97 g/cm ³	0%	0.27-0.30	40 Wm/°C	8.8x10 ⁻⁶ /°C	15-50 KV/mm	7.5-11.5		1000 MPa	1700 Vickers	10 ¹⁴ ohm/cm	2000°C	5.8x10 ⁻⁶	750 J/kgK	2100

* Inert atmosphere

PRECISION CERAMICS

total ceramic solutions for the 21st century

This table is intended as a guide only. Although every effort is made to ensure the accuracy, in some cases properties can vary.